

(12)特許協力条約に基づいて公開された国際出願

(19)世界知的所有権機関  
国際事務局



(43)国際公開日  
2005年2月10日 (10.02.2005)

PCT


(10)国際公開番号  
WO 2005/013646 A1

- (51)国際特許分類: H05B 37/02, G05B 11/36  
(72)発明者; および  
(21)国際出願番号: PCT/JP2004/003454  
(75)発明者/出願人(米国についてのみ): 三木 光範(MIKI, Mitsunori) [JP/JP]; 〒6190225 京都府相楽郡木津町木津川台2-8-1 Kyoto (JP).  
(22)国際出願日: 2004年3月15日 (15.03.2004)  
(74)代理人: 谷川 英和(TANIGAWA, Hidekazu); 〒5400008 大阪府大阪市中央区大手前1丁目7-31 OMMビル8階私書箱53号 Osaka (JP).  
(25)国際出願の言語: 日本語  
(81)指定国(表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.  
(26)国際公開の言語: 日本語  
(30)優先権データ:  
特願2003-285901 2003年8月4日 (04.08.2003) JP  
(71)出願人(米国を除く全ての指定国について): 学校法人同志社(THE DOSHISHA) [JP/JP]; 〒6028580 京都府京都市上京区今出川通烏丸東入玄武町601番地 Kyoto (JP).

[統葉有]

(54) Title: ILLUMINATION CONTROL SYSTEM AND CONTROL SYSTEM

(54)発明の名称: 照明制御システムおよび制御システム

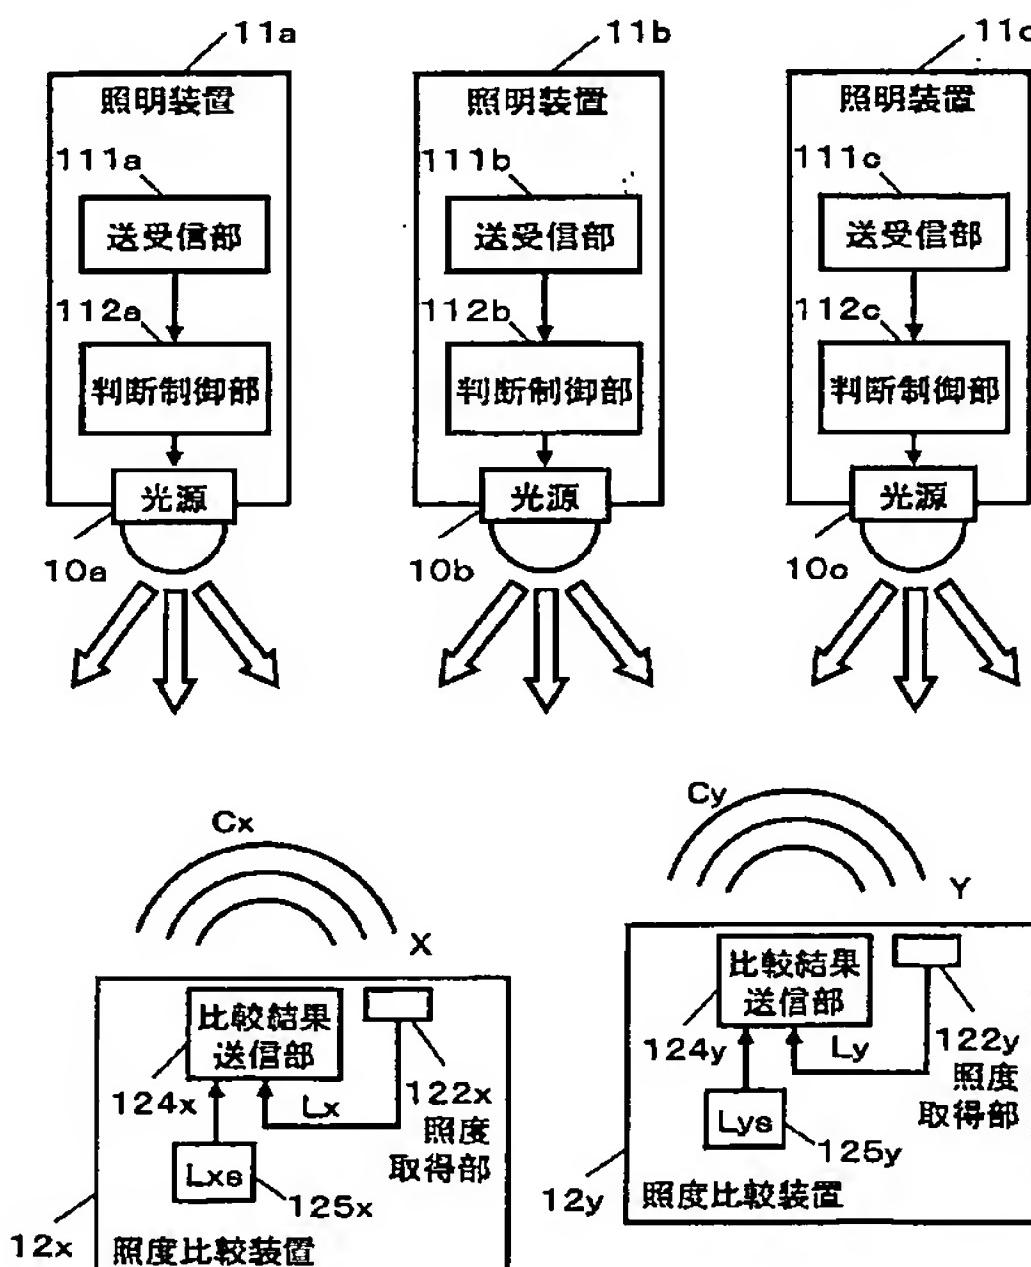

11a...ILLUMINATION DEVICE  
111a...TRANSMISSION/RECEPTION SECTION  
112a...JUDGMENT CONTROL SECTION  
10a...LIGHT SOURCE  
11b...ILLUMINATION DEVICE  
111b...TRANSMISSION/RECEPTION SECTION  
112b...JUDGMENT CONTROL SECTION  
10b...LIGHT SOURCE  
11c...ILLUMINATION DEVICE  
111c...TRANSMISSION/RECEPTION SECTION  
112c...JUDGMENT CONTROL SECTION  
10c...LIGHT SOURCE  
124x...COMPARISON RESULT TRANSMISSIONS SECTION  
122x...ILLUMINANCE ACQUISITION SECTION  
12x...ILLUMINANCE COMPARISON DEVICE  
124y...COMPARISON RESULT TRANSMISSIONS SECTION  
122y...ILLUMINANCE ACQUISITION SECTION  
12y...ILLUMINANCE COMPARISON DEVICE

(57) Abstract: An illumination control system includes at least two illumination devices and at least one illuminance comparison device. The illuminance comparison device compares an illuminance at an arbitrary position with a target illuminance and supplies the comparison result to the illumination devices. The at least two illumination devices make judgment according to the comparison result acquired from the illuminance comparison device and repeat increase/decrease of light intensity of the respective devices so as to control the illuminance at the arbitrary position almost to the target illuminance. By using this illumination control system, it is possible to control a predetermined position to a desired illuminance.

[統葉有]

WO 2005/013646 A1